



Datasheet DXQ Series

Available Distribution



LED




Dimensions

Part Number	Diameter	Height
LL01BR-DXQxxL06-M2	Ø30	17
LL01CI-DXQxxL06-M2		

*All dimensions are in millimeters.


Packaging Details (SPQ)



Recommnd Applications



General Information



- Lens Material: PMMA 8N
- Operating Temperature: -40°C~+70°C
- UL Flammability: HB @ 1.5mm
- UL RTI Elec: 90°C @ 1.5mm
- Light Transmission Rate: 400nm~900nm > 90%
- ☑ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- 🧤 Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Accessories




- 2 Different Types of Holder
LL01BRABC01H2
LL01CIABC02H2

Mechanical Specification

*All dimensions are in millimeters.


Lens Dimension

LL01ZZ-DXQ××L06

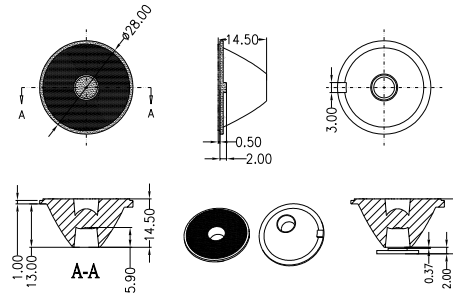

Holder Dimension

LL01BRABC01H2

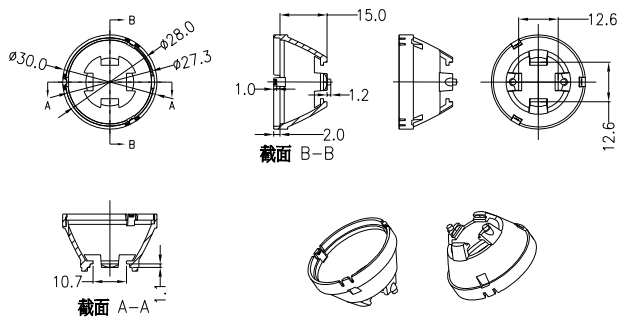


Assembly Instruction

Part No LL01BR-DXQ××L06-M2
Holder LL01BRABC01H2

Fixing Method




Luminarie
Accessories



Holder Dimension

LL01CIABC02H2

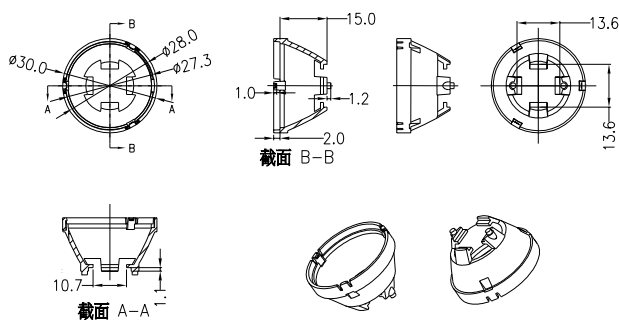


Assembly Instruction

Part No LL01CI-DXQ××L06-M2
Holder LL01CIABC02H2


Fixing Method









Luminarie
Accessories

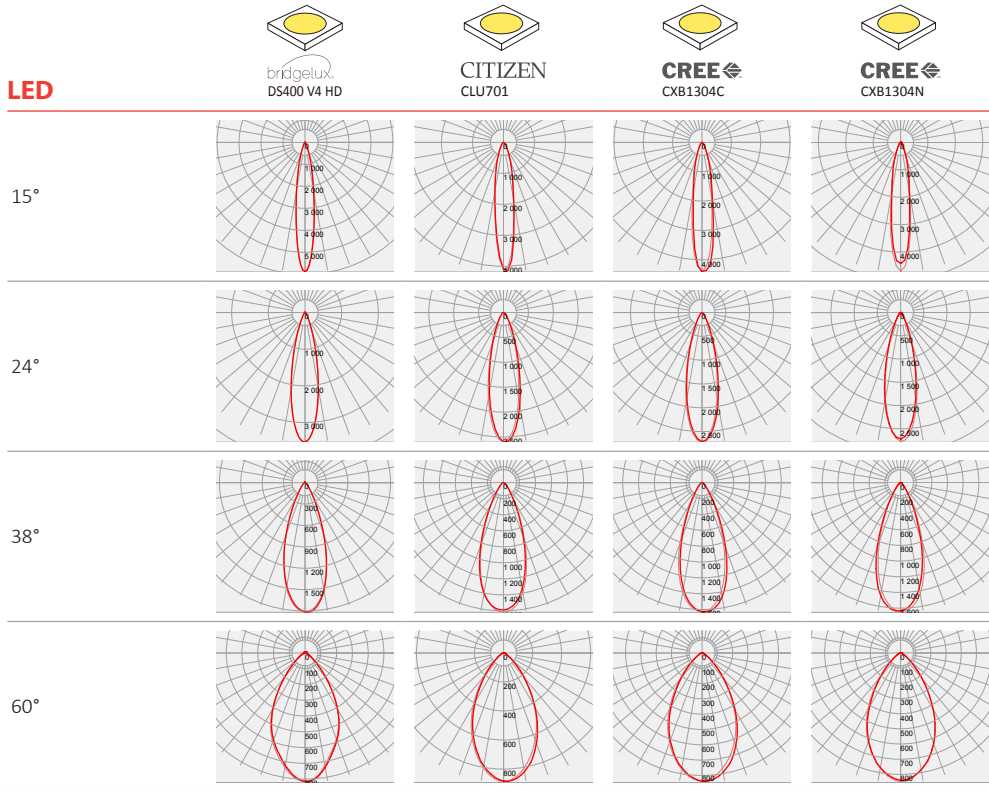





















Photometric Distribution




Details by LED

Part No	Holder	LED Package Size	LED
LL01BR-DXQxxL06-M2	 LL01BRABC01H2	LES Ø4.5	 bridgelux DS400 V4 HD
LL01CI-DXQxxL06-M2	 LL01CIABC02H2	LES Ø6	   CITIZEN CLU701 CREE CXB1304C CREE CXB1304N

LED	Part No	FWHM	cd / lm	IES
	LL01BR-DXQ15L06-M2	16°	5.8	
	LL01BR-DXQ24L06-M2	23°	3.5	
	LL01BR-DXQ38L06-M2	36°	1.8	
	LL01BR-DXQ60L06-M2	60°	0.8	
	LL01CI-DXQ15L06-M2	16°	4.1	
	LL01CI-DXQ24L06-M2	27°	2.5	
	LL01CI-DXQ38L06-M2	39°	1.6	
	LL01CI-DXQ60L06-M2	57°	0.8	
	LL01CI-DXQ15L06-M2	17°	4.4	
	LL01CI-DXQ24L06-M2	27°	2.7	
	LL01CI-DXQ38L06-M2	39°	1.6	
	LL01CI-DXQ60L06-M2	59°	0.8	
	LL01CI-DXQ15L06-M2	17°	4.6	
	LL01CI-DXQ24L06-M2	28°	2.7	
	LL01CI-DXQ38L06-M2	39°	1.6	
	LL01CI-DXQ60L06-M2	60°	0.8	

Product Nomenclature

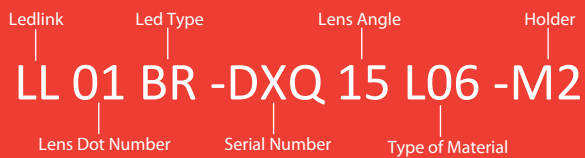

Ledlink Optics, Inc Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd Dongguan Factory

No.5, TianKeng Industrial Dist., HengLiTown, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

