



About

Share





[www.ledbydesign.asia](http://www.ledbydesign.asia)

Item name	LV PowerDim - 1 Channl DC driver
Ordering code	1CH-CAS-DRV-350-700mA
Item code	1CH-CAS-DRV-HC (High Current)
Date	August 2020

LV PowerDim: 1 Channel Casambi LED Driver (HC)

Work with Stucchi LV Track adapter

SEC	1	2	3
350mA	OFF	OFF	OFF
400mA	OFF	OFF	ON
450mA	OFF	ON	OFF
500mA	OFF	ON	ON
550mA	ON	OFF	OFF
600mA	ON	OFF	ON
650mA	ON	ON	OFF
700mA	ON	ON	ON

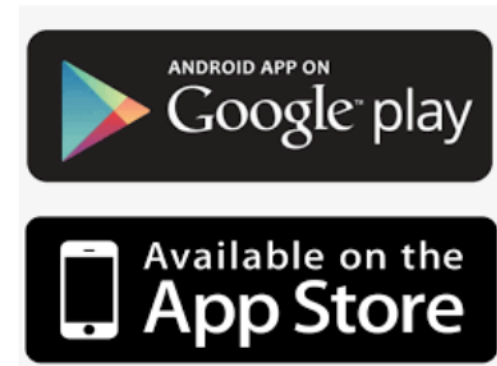

**Description**

LV PowerDim is Casambi enabled wireless controlled LED driver with 1 channel out put. (HC - High current version).  
 LV PowerDim is low voltage 48VDC driver works with Stucchi LV track system and fit perfectly in to Stucchi LV track adapters.  
 Adiustable outout current from 350mA to 700mA bv DIP switch.

**Technichal Information**

Input:	
Power	48VDC
Output	1 Channel 8-43V
Output Current	350mA-700mA