carus

Data Sheet Carus Connect

E27 560 Lumen Smart White

Technical Data

Supply Voltage 220-240V | 50/60Hz Rated Power W0,8 70lm/W Lumen per Watt **Energy Efficiency Class** A+AC Operation Yes DC Operation No


Rated Luminous Flux 10lm - 560lm 2.200K - 4.500K Color Temperature Color Rendering Index >95 Color Consistency SDCM ≤ 6 Beam Angle 150°

25.000 Number of Switching Cycles 25.000h Rated Lifetime Luminous Flux Maintenance Factor at End of Life Time 0,7 Starting Time <0,5s

Operating Temperature -20°C bis +40°C -20°C bis +60°C Storage Temperature

IP Protection Class IP50





Dimming and Color Temperature Selection

Carus Connect Smart White is dimmable via Casambi smartphone app. It can be controlled by Casambi xPress and by existing switches with appropriate Casambi app settings.

Dimming with phase dimmers is not possible.

Color temperature settings can also be done with Casambi App, Casambi xPress or existing switches which are configurated with the Casambi app.

Dimensions

Height	108mm
Diameter	60mm
Weight	76g
Form	A60
Base	E27

Ø 60

Application Information

For indoor use in dry environment Applicable in luminaires designed for outdoor use


Disposal Information

LED-Lamps need an environmentally compatible disposal Carus LED-Lamps meet RoHS and REACH requirements




carus


Spectral Distribution 2.200K

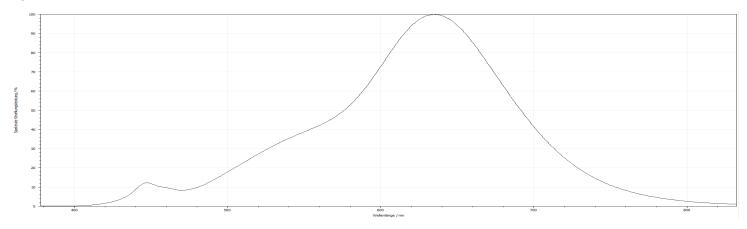

Spectral Distribution 2.700K

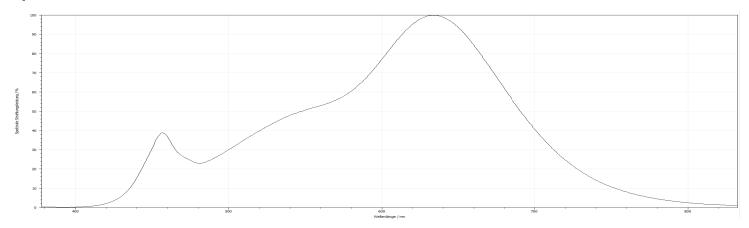

Spectral Distribution 4.500K

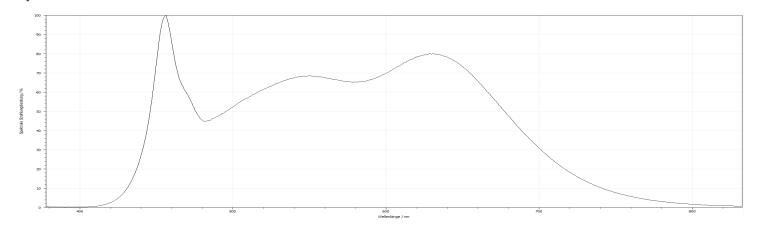

PackagingFolding Box

Article Number 1016455

EAN Code 4260406080406

Dimensions of Single Packaging Unit

80mm x 72mm x 146mm

Manufacturer Data

Carus GmbH & Co. KG Rosenstraße 8 D-35037 Marburg

T: +49 (0)6421 - 604 500 E: info@carus-world.com W: www.carus-world.com

WEEE-Reg.-Nr.: DE 13926631