


AS 500

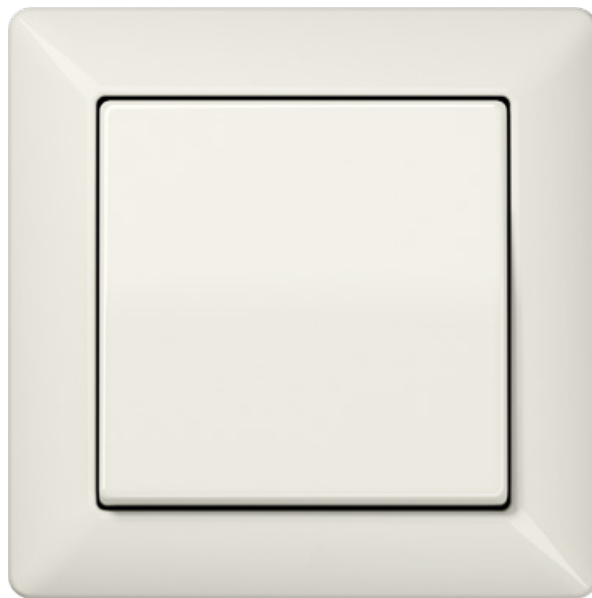

IVORY
similar RAL 1013

The AS 500 combines a clear, linear language of form with great functionality. The AS 500 distinguishes itself with its curved rocker switch surface. The duroplastic frames and covers are available in ivory and white.

AS 500


Material

Duroplastic

Protection IP 44

Protection level IP 44 is ensured with sealing gasket ref.-no. 551 WU and „IP 44 frame“ of the respective design range.

Please combine preferably with Duroplastic (highly scratch-resistant, high-gloss) covers

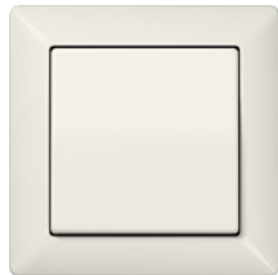

Switch



Rotary dimmer



F 40 sensor, 4-gang








F 50 sensor, 4-gang



Switch/socket combination

Frame size

- 1-gang 80.5 mm x 80.5 mm
- 2-gang 80.5 mm x 151.5 mm
- 3-gang 80.5 mm x 222.5 mm
- 4-gang 80.5 mm x 293.5 mm
- 5-gang 80.5 mm x 364.5 mm



Frames can be installed horizontally and vertically.

