

## TRAN-E-CSB-D8

### Technical Datasheet for Bluetooth DALI Controller



## Description

The TRAN-E-CSB-D8 is a system protocol translator with Casambi integration, converting the bluetooth commands to a DALI output.

Capable of broadcasting DALI to a maximum of 30 devices, or individually addressing up to 8 DALI devices.

- DALI Broadcast Mode
- Casambi Enabled
- Addressable DALI Mode
- 1 Channel BLE/DALI Dimming Controller
- Bluetooth Beacons



## Technical Specifications

### Mechanical

Housing	Black Plastic Injection Moulded ABS
Dimensions	103mm x 35mm x 28mm
Weight	52g
Protection	IP20
Mounting	Screwdown

### Input

Voltage Range	120-277VAC
Frequency	50-60Hz
Max Mains Current	20mA
No-load Standby Power	<500mW (No loads on DALI bus)

### DALI Output

Voltage Range	16VDC @ 60mA Max
Max. drivers	30

### Radio Transceiver

Operating Frequencies	2.4Ghz - 2.483Ghz
Maximum Output Power	+4dBm
Wireless Protocol	Bluetooth Low Energy v4.1


### Operating Conditions

Ambient Temperature	0°C to +50°C
Max. Case Temperature	+75°C
Storage Temperature	-40°C to +80°C
Max. Relative Humidity	80% non-condensing


### Connectors

Wire Range	0.2mm - 1.5mm
Wire Strip Length	5mm

## Dimensions

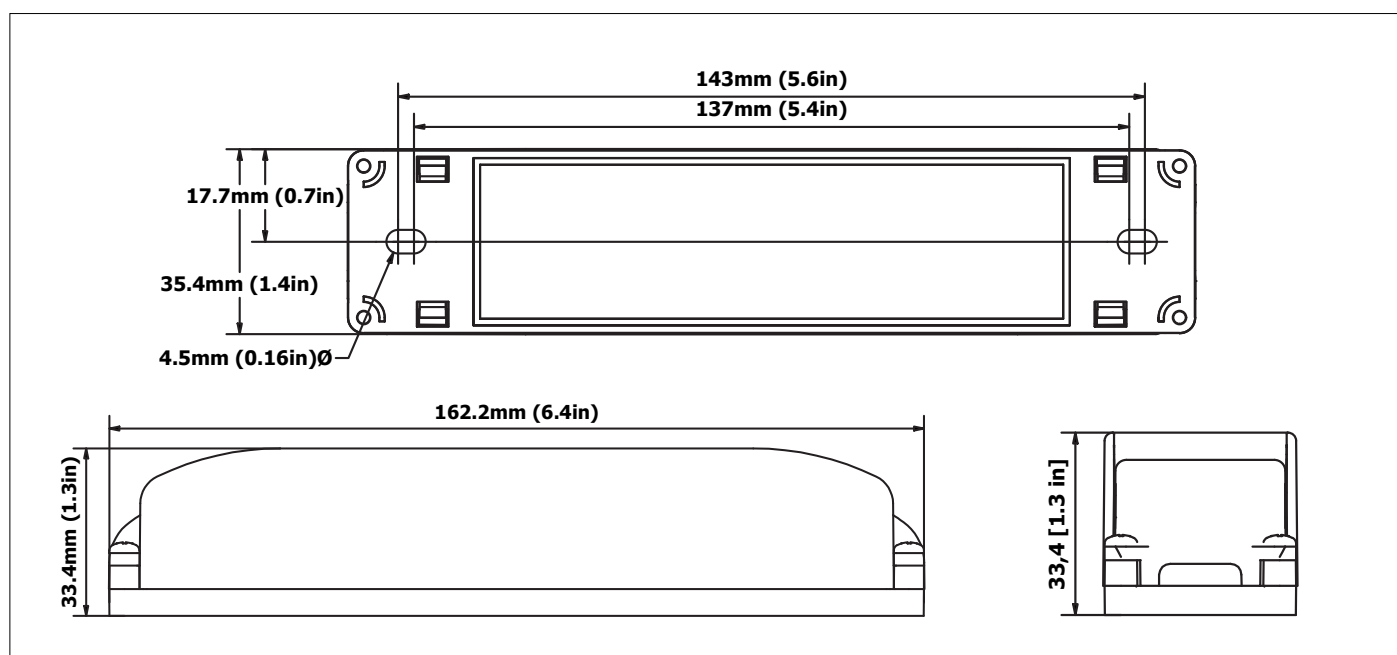

## Wiring Diagram

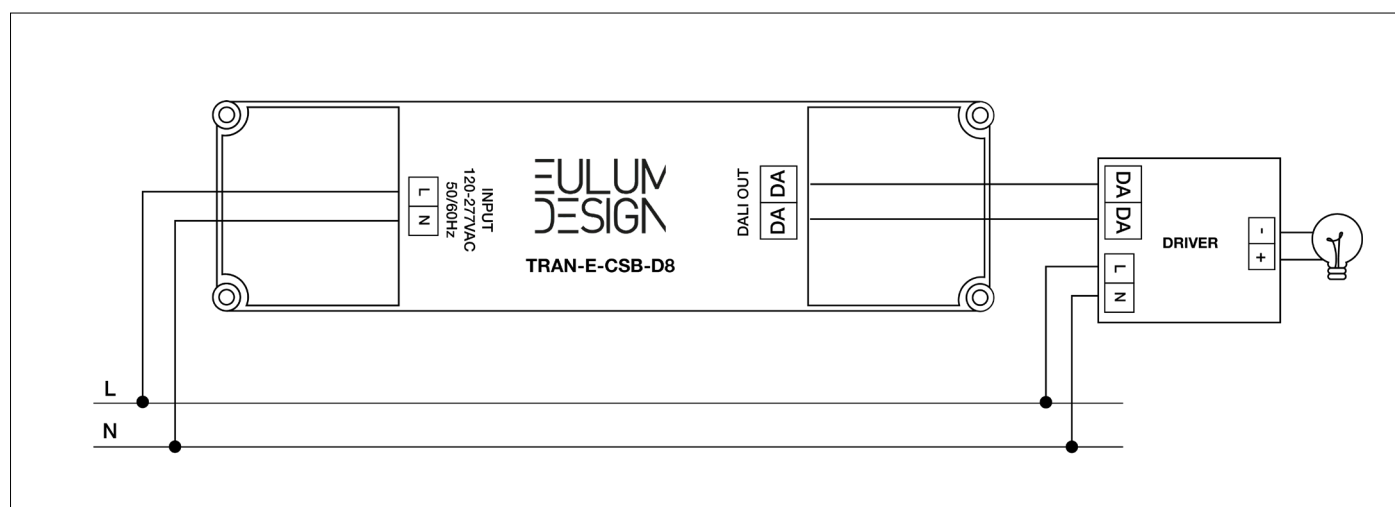

## Range

In open air, the bluetooth range can reach up to 75m. This will be reduced when placed inside a building. Please note that putting the bluetooth unit inside a metal enclosure is unadvised as this will dramatically reduce the signal range.

## Compatible Devices:

iPhone iOS and later are supported  
 iPad iOS 10 and later are supported  
 Android 4.4 version (KitKat) and later are supported.



## Warranty

For information on our warranty, please visit: [www.eulum.com/warranty/](http://www.eulum.com/warranty/)